


## Brass Ball Valve - EN331 British Gas Approved



Nickel Plated Brass Body, Screwed BSPP Female, Full Bore,  
 Yellow PVC Coated Steel Lever

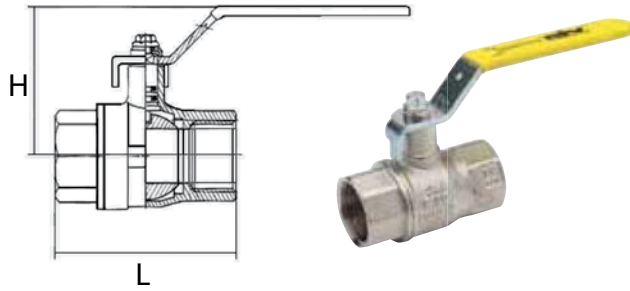

### Pressure/Temperature Ratings

|                   |                  |      |
|-------------------|------------------|------|
| Pressure          | 1/4" to 1/2"     | PN40 |
|                   | 3/4" to 1"       | PN32 |
|                   | 1 1/4" to 2 1/2" | PN25 |
|                   | 3" - 4"          | PN16 |
| Temperature Range | -20°C to 110°C   |      |

### Material List

|              |                     |
|--------------|---------------------|
| Body         | Brass Nickel Plated |
| Ball         | Brass Nickel Plated |
| Stem         | Brass               |
| Stem O-Rings | NBR                 |
| Lever        | Steel PVC Coated    |

### Dimensions

| DN     | H   | L   | Kg   |
|--------|-----|-----|------|
| 1/4"   | 48  | 48  | 0.08 |
| 3/8"   | 48  | 48  | 0.1  |
| 1/2"   | 55  | 55  | 0.16 |
| 3/4"   | 66  | 66  | 0.27 |
| 1"     | 70  | 70  | 0.41 |
| 1 1/4" | 83  | 83  | 0.62 |
| 1 1/2" | 93  | 93  | 0.87 |
| 2"     | 102 | 102 | 1.5  |
| 2 1/2" | 143 | 143 | 2.03 |
| 3"     | 153 | 153 | 3.72 |
| 4"     | 187 | 187 | 5.98 |